FM 200

NON-ADHESIVE FLAGGING TAPE

TYPICAL APPLICATIONS

- For color-coding, tagging and marking applications
- Can be used for marking survey boundaries, cables and pipes, roping off areas, and marking hazards

PRODUCT FEATURES

- Durable construction
- Easy to tear
- Easy to tie
- High visibility
- Resistant to moisture and humidity
- Stays pliant in cold temperatures
- Writable

CONSTRUCTION

Overall Grade/Function: Contractor Backing: PVC film Adhesive: None

STANDARD WIDTH(S)

1.1875 in


STANDARD LENGTH(S)

150 ft300 ftContact your Shurtape sales representative for other available sizes

STORAGE AND USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLOR(S)

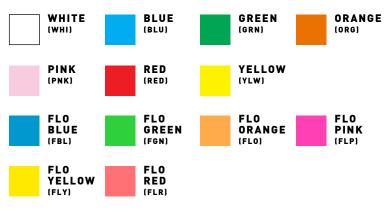

PHYSICAL PROPERTIES STANDARD METRIC

 Thickness
 2-4 mils
 0.05-0.10 mm

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.





Shurtap